

Video Amplifier

MODEL CODE	TYPE
------------	------

HVA-1001	Single output
----------	---------------

FEATURES

- Single output video amplifier
- DC plug patch lead and AC power adapter included
- Frequency range 50 - 900MHz



DC Power Module

MODEL CODE	TYPE
------------	------

HDP-1060	60W DC
----------	--------

FEATURES

- 60W DC switching power supply
- 1x 5V DC and 7.5V selectable DC output port, centre pin 2.0mm
- 3x 12V DC output port, centre pin 2.5mm
- 1x 12V DC output port, 4 pin 5.08mm socket for over 3A current requirements
- Built-in EMI filter, low ripple noise




Universal Mounting Bracket

MODEL CODE	TYPE
------------	------

HBK-1001	Universal Enclosure
----------	---------------------

FEATURES

- Size 160 x 100mm
- Row to row pitch 2cm
- Diameter of each row 3mm

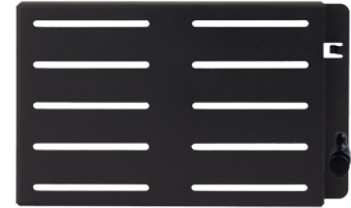

IR Distribution Module

MODEL CODE	TYPE
------------	------

HIR-1004	4 Port
HIR-1008	8 Port

FEATURES

- 4 Port / 8 Port IR Distribution module
- Activity indication LEDs
- Sensitivity adjustable for each location
- Includes Expansion Port



IR Emitter

MODEL CODE	TYPE
------------	------

HEM-1001	Single head, mono
HEM-1002	Dual head, stereo

FEATURES

- 3M cord with 3.5mm mono plug
- Use ISK-350 Series for connection of the emitter to wall plate




Keystone IR Sockets

MODEL CODE	TYPE
------------	------

ISK-350-WH	Mono
ISK-350S-WH	Stereo

FEATURES

- Keystone 3.5mm socket module



IR Receiver

MODEL CODE	TYPE
------------	------

HRC-1001	Wall Plate
----------	------------

FEATURES

- Wall plate type IR receiver
- Terminal block allows for easier wiring
- 12VDC supplied by HIR-1004/HIR-1008
- Can be fitted to Keystone face plate



IR Receiver

MODEL CODE	TYPE
------------	------

HRC-1003	Box
----------	-----

FEATURES

- Box type IR receiver
- 1M cord with RJ45 Keystone Jack
- 12VDC supplied by HIR-1004/HIR-1008
- Use RJ45 Keystone Jack for connection of IR receiver to wall plate



IR Receiver

MODEL CODE	TYPE
------------	------

HRC-1004	Box
----------	-----

FEATURES

- Box type IR receiver
- Adjustable IR carrier frequency from 32 to 56 KHz
- 1M cord with 3.5mm stereo plug
- 12VDC supplied by HIR-1004/HIR-1008
- Use ISK-350S-WH for connection of IR receiver to wall plate

